## **COMMAND MODULE 3.0**



## Notes:

- Make all new files from carfile.em out of this box (do not use old files)
- Display turns red when safety box is tripped
- Using pan pressure input will only trip throttle output. (if not using throttle release, pan pressure switch must be wired to fire bottle or driver switch to shut off car)
- File transfer menu has changed
- All regulators has pressure curve shift function
- Updated software available on www.electrimotion.com
- Racepak voltage output levels have changed from SB002a

Standby Analog output = 0.125v

Fire Bottle/Driver Button Analog out = +0.125v change

Tether Analog output = +0.25v change


Pan Psi Analog output = +0.5v change

RF Analog output = +0.75v change

RF Override Analog output = +1.0v change

RPM Analog output = +2.0v change

## **Command Module Safety Box Input Harness**

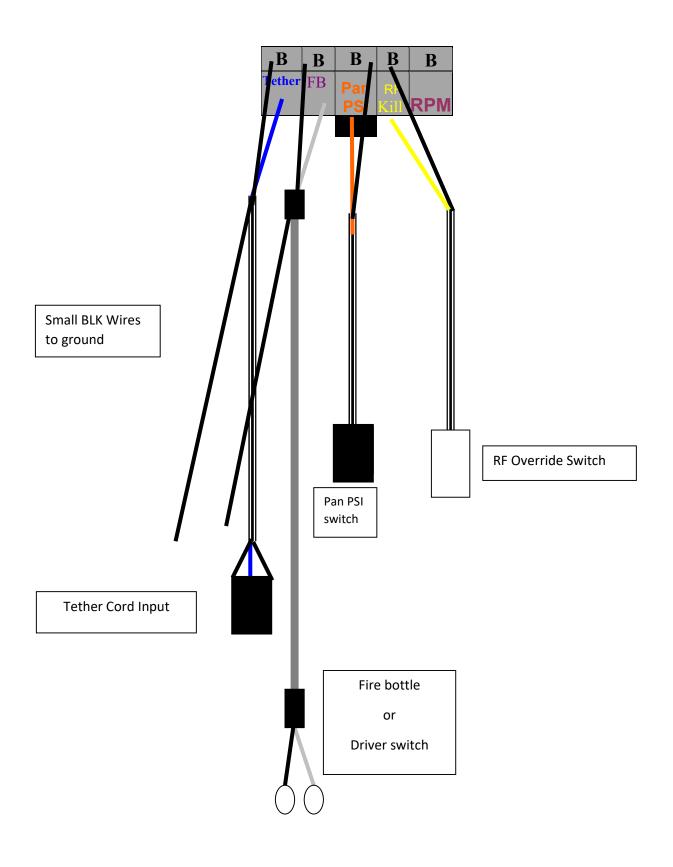

## **Command Module Safety Box Output Harness**

